



GX52



150+ Amp 12-800 V


1. , , --
2. EPIC® 175 -
3. - UL1604 I 2 2
3 IP67
30 IP69K, SAE J1171
ISO8846
4. - 12VDC 24VDC
5. --
6. -
7. -

| | X | - |
|----------------|--------------|-------------|
| (2A, 24VDC) 1. | A or B | - |
| | | 1,000,000 |
| 2. | mohms | 0.4 |
| | mohms | 0.15 to 0.3 |
| 4. | Mohms | 100 |
| 1mA | VRMS | 2,200 |
| , 11ms | G | 20 |
| (500-2000 Hz) | G | 15 |
| 5. | °C | -55 to +85 |
| | °C | -70 to +150 |
| , | Kg(Lb) | 0.46 (1.0) |
| | IP67 & IP69K | |
| | MIL-STD-810 | |

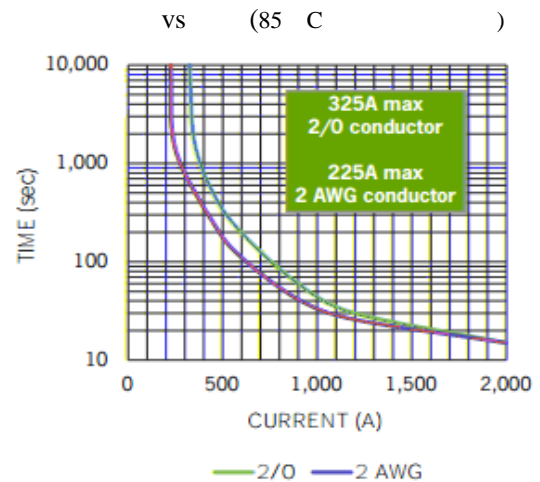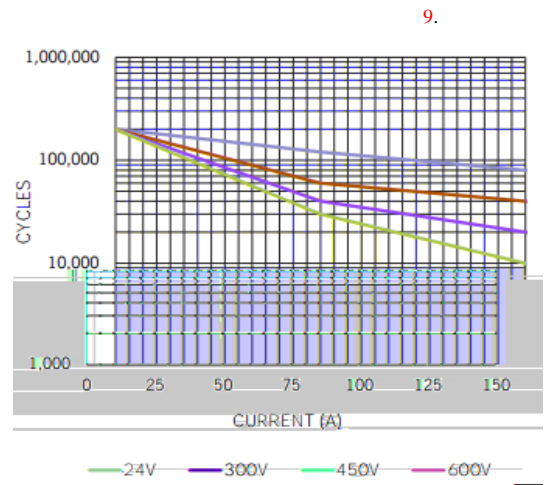

25

| P/N | B | C | F | H | J | K | L | S | T |
|-------------------------|------|------|------|-------|------|---------|---------|-------|--------|
| (VDC) | 12 | 24 | 48 | 72 | 120 | 120 VAC | 240 VAC | 12 | 24 |
| (V) | 16 | 32 | 64 | 96 | 140 | 140 | 280 | 16 | 32 |
| (V) 7. | 8 | 16 | 28 | 46 | 72 | 80 | 160 | 9 6,8 | 15 6,8 |
| (V) 7 | 3 | 7 | 10 | 14 | 18 | 30 | 60 | 4.5 | 7 |
| (V) 7 | 0.5 | 0.5 | 1.8 | 2.7 | 4.5 | 4.5 | 9 | 1 | 1.5 |
| (A) (75 ms) 7 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 1.7 | 0.76 |
| (A) 7 | 0.68 | 0.28 | 0.16 | 0.095 | 0.06 | 0.06 | 0.04 | 0.084 | 0.032 |
| (W) 7 | 8 | 6.8 | 7.6 | 6.8 | 7.2 | 7.2 | 9.6 | 1 | 0.768 |





| GX52 | B | A | B |
|------|---------------|--------|-------|
| | B = 12 Vdc, | | |
| | C = 24 Vdc, | | |
| | F = 48 Vdc, | | |
| | H = 72 Vdc, | | |
| | J = 120 Vdc, | | |
| | S = 12 Vdc, , | | |
| | T = 24 Vdc, , | | |
| | | D = M4 | |
| | | | = |
| | | | B = - |
| | | | C = - |

GIGAVAC

A2(+) A1(-)

27μ H

