



GX52



150+ Amp 12-800 V

1. , , --
2. EPIC® 175 -
3. - UL1604 I 2 2
3 IP67
30 IP69K, SAE J1171
ISO8846
4. - 12VDC 24VDC
5. --
6. -
7. -

	X	-
(2A, 24VDC) 1.	A or B	-
		1,000,000
2.		
	mohms	0.4
	mohms	0.15 to 0.3
4.	Mohms	100
	VRMS	2,200
1mA		
, 11ms	G	20
	G	15
(500-2000 Hz)		
5.	°C	-55 to +85
	°C	-70 to +150
,	Kg(Lb)	0.46 (1.0)
		IP67 & IP69K

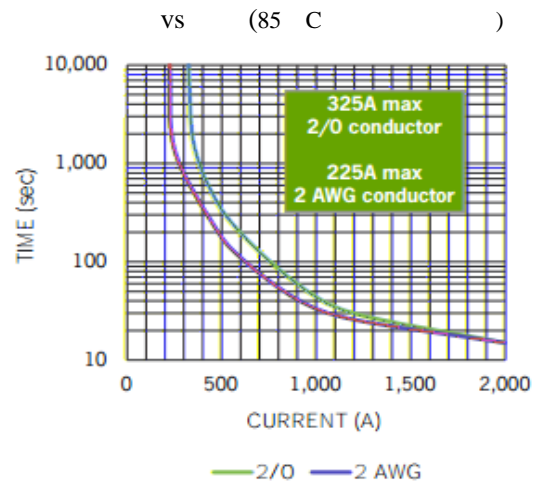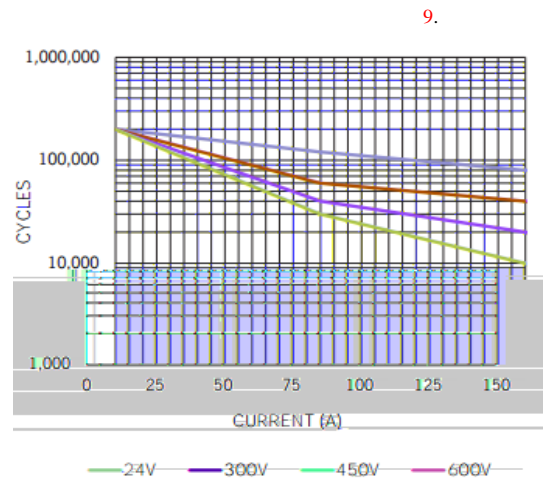

P/N	B	C	F	H	J	K	L	S	T
(VDC)	12	24	48	72	120	120 VAC	240 VAC	12	24
(V)	16	32	64	96	140	140	280	16	32
(V) 7.	8	16	28	46	72	80	160	9 6,8	15 6,8
(V) 7	3	7	10	14	18	30	60	4.5	7
(V) 7	0.5	0.5	1.8	2.7	4.5	4.5	9	1	1.5
(A) (75 ms) 7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1.7	0.76
(A) 7	0.68	0.28	0.16	0.095	0.06	0.06	0.04	0.084	0.032
(W) 7	8	6.8	7.6	6.8	7.2	7.2	9.6	1	0.768



GX52	B	A	B
	B = 12 Vdc,		
	C = 24 Vdc,		
	F = 48 Vdc,		
	H = 72 Vdc,		
	J = 120 Vdc,		
	S = 12 Vdc, ,		
	T = 24 Vdc, ,		
		D = M4	
			=
			B = -
			C = -

GIGAVAC

A2(+) A1(-)

27μ H

